


Shut-off valves for ceiling pendants

IDENTIFICATION

- ▶ Full-bore 2-way floating-ball valves
- ▶ Nickel-plated brass body
- ▶ Open/close position by 90° handle
- ▶ Connection to the gas network with welded fitting
- ▶ Connection to the gas network by means of nickel-plated brass body hose connector
- ▶ Quick connection to the gas distribution for pipes $\varnothing < 7$ mm
- ▶ Optional fixing bracket for 4 valves

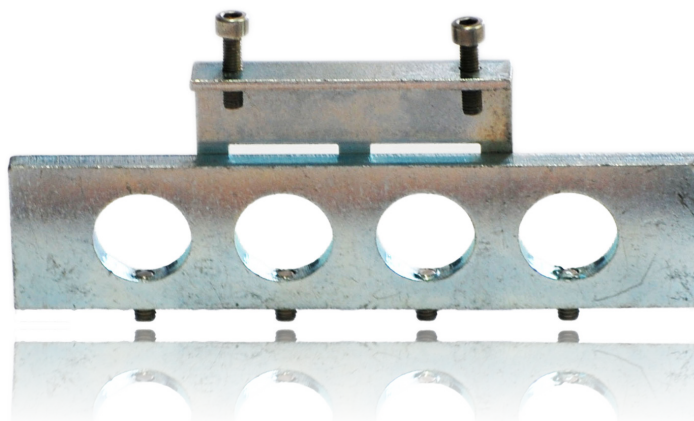


REFERENCE STANDARDS

ISO 7396-1: "Medical gas pipeline systems - Part 1: Pipeline systems for compressed medical gases and vacuum"

ISO 15001: "Anaesthetic and respiratory equipment - Compatibility with oxygen"

* Validity of the standards is referred to the current year


Warranty: 1 year from shipment date

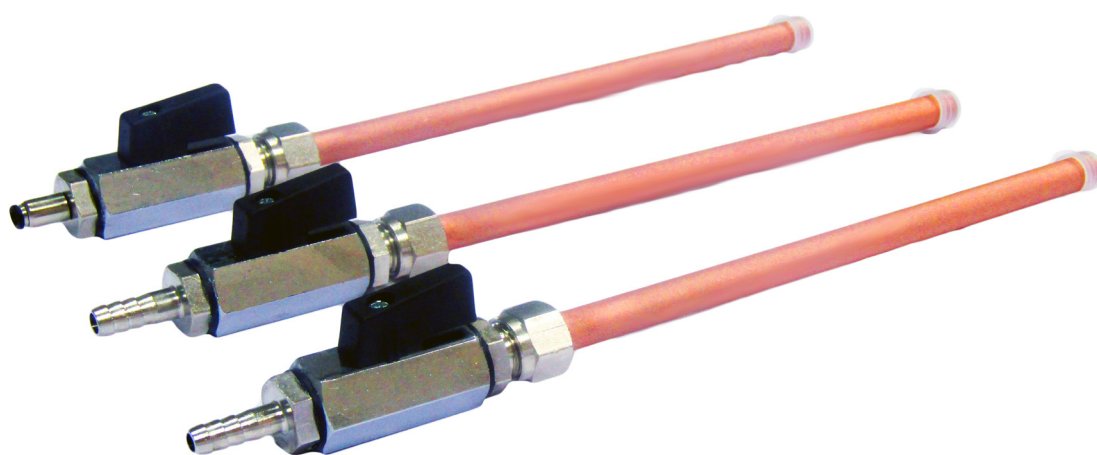

- ▶ Gases: Vacuum, Oxygen, Medical Air, Nitrous Oxide, Carbon Dioxide, Instrumental Air


- ▶ Working temperature: $+10\text{ °C} \div +40\text{ °C}$
- ▶ Nominal Pressure PN 10
- ▶ Stockage Temperature $-20\text{ °C} \div +60\text{ °C}$







Shut-off valves for ceiling pendants



SHUT-OFF VALVE WITH PIPE CONNECTOR
Ø 7-8 mm KT-060P-0002, KT-060P-0003

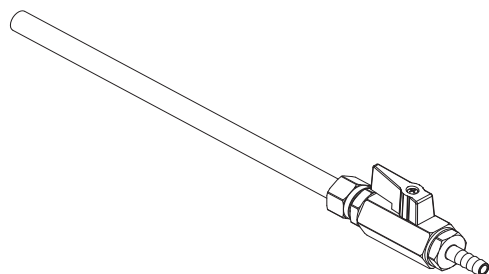

SHUT-OFF VALVE WITH QUICK CONNECTION
Ø 3 mm KT-060P-0004

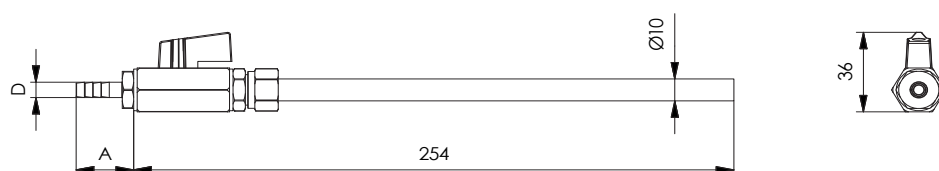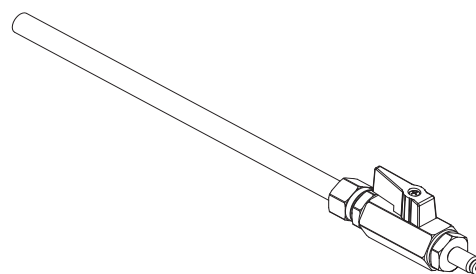

FIXING BRACKET FOR 4 VALVES
KT-060P-0001

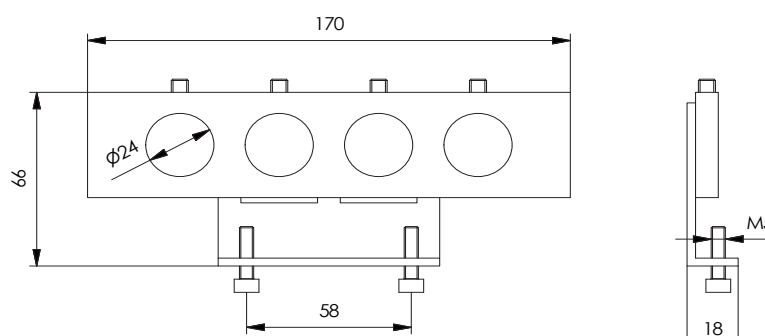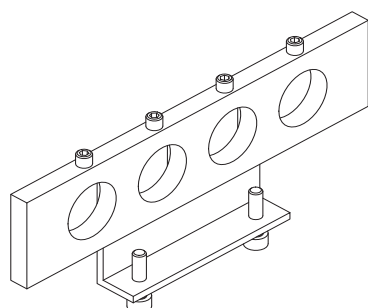

FIXING BRACKET FOR 4 VALVES

CODE	DESCRIPTION	PACKAGING	
		type	kg
KT-060P-0001	Fixing bracket for 4 valves	bag	0,2

SHUT-OFF VALVES FOR CEILING PENDANTS

CODE	DESCRIPTION	DIMENSIONS		PACKAGING	
		D DIAMETER	A CONNECTOR	type	kg
KT-060P-0002	Shut-off valve with pipe connector	7 mm	24 mm	bag	0,2
KT-060P-0003	Shut-off valve with pipe connector	8 mm	24 mm		
KT-060P-0004	Shut-off valve for quick connection	3 mm*	20 mm		

*Diameter of the external pipe for quick connection

