







IDENTIFICATION

- Probes for medical gas and vacuum distribution terminal units type DIN 13260-2
- Can be supplied with straight hose connector, 90° hose connector, G ¼" F fitting
- Integrated check valve (Vacuum probes excluded)
- G ¼" M fitting for probe dedicated to direct connection with accessories (suction equipment, flow meters)
- Made of nickel-plated brass
- Laser-engraved production lot and product code

CE MARKING

Notified body: CE 0426 CE marking in risk class II B in accordance with Legislative Decree 24 February 1997, no. 46 "Implementation of Directive 93/42/EEC, concerning Medical Devices" and further modifications

REFERENCE STANDARD

ISO 9170-1: "Terminal units for medical gas pipeline system - Part 1: Terminal units for use with compressed medical gases and vacuum"

ISO 7396-1: "Medical gas pipeline systems - Part 1 : Pipeline systems for compressed, medical gases and vacuum "

DIN 13260-2: "Supply systems for medical gases – Part 2: Dimensions and allocation of probes and gas-specific connection points for terminal units for compressed medical gases and vacuum" **ISO 15001:** "Anaesthetic and respiratory equipment. Compatibility with oxygen"

* Validity of the standards is referred to the current year






DIN 13260-2 probes





DIMENSIONS

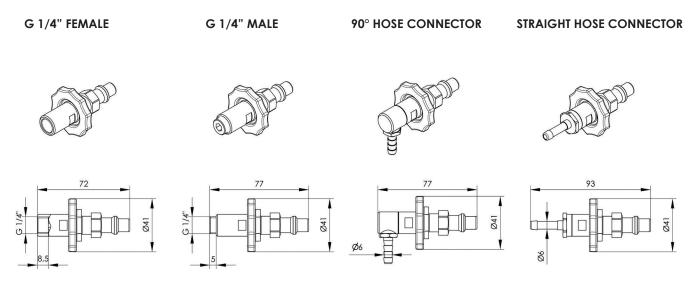

- Gases: Vacuum, Oxygen, Medical Air, Nitrous Oxide, Carbon Dioxide
- Storage temperature: -20 °C ÷ +60 °C
- Working temperature: +10 °C ÷ +40 °C
 Hose connector for flexible hose
 - Øi = 6 ÷ 6.5 mm

CODE				GAS	SHAPE	NOMINAL PRESSURE	PACKAGING		
OPP ^a	a Plan	- Alexandre	- ADF			bar	type	k g	pcs
PF-06DF-00O2	PF-06DF-20O2	PF-06DP-00O2	PF-06DP-10O2	02	0	4 +1,0	bag	0.10	1
PF-06DF-000V	PF-06DF-200V	PF-06DP-000V	PF-06DP-100V	Vac		≤-0,4	bag	0.10	1
PF-06DF-00AC	PF-06DF-20AC	PF-06DP-00AC	PF-06DP-10AC	Air		4 ^{+1,0} -0,0	bag	0.10	1
PF-06DF-0N2O	PF-06DF-2N2O	PF-06DP-0N2O	PF-06DP-1N2O	N ₂ O	Ō	4 +1,0	bag	0.10	1
PF-06DF-0CO2	PF-06DF-2CO2	PF-06DP-0CO2	PF-06DP-1CO2	CO_2	\circ	4 ^{+1,0} -0,0	bag	0.10	1